

# Next Generation IEEE 802.11 abgn/ac/ax Plus Bluetooth PCIe Combo Module

## SX-PCEAX



## Wi-Fi 6E: Turbocharged Wi-Fi for Medical & Industrial Applications

### Product Overview







The Silex's SX-PCEAX is one of the industry's first Wi-Fi 6E modules. This Wi-Fi 6E module extends the benefits that Wi-Fi 6 already provides in the 2.4 and 5 GHz bands to 6 GHz and helps increase overall capacity and performance. SX-PCEAX is a tri-band IEEE 802.11 abgn/ac/ax WLAN module plus Bluetooth 5.2 BR/EDR/LE combo module based on Qualcomm's QCA2066 SoC. As the number of Wi-Fi devices in use worldwide continues to proliferate, making the available spectrum more congested, this Wi-Fi 6E module will be ideal for future-proofing your devices in these dense environments.

### Benefits

#### Wi-Fi 6E

Adds the 6GHz spectrum. Devices can operate in the 6 GHz band providing:

- Six times more capacity than 2.5 and 5 GHz bands
- Seven superwide 160 MHz channels
- Lower latency, less congestion

Wi-Fi 6E brings Wi-Fi® into 6 GHz	
Features	Benefits
 More, contiguous spectrum	 Gigabit speeds
 Wider channels	 Extremely low latency
 Less interference	 High capacity

#### Multi-User Multiple Input Multiple Output (MU-MIMO)

Allows more downlink data to be transferred at once and enables an access point to concurrently transmit data to a larger number of devices.

#### 160 MHz channels

Increases bandwidth to deliver greater performance with low latency.

#### Target Wake Time (TWT)

Significantly improves battery life in Wi-Fi devices, such as Internet of Things (IoT) devices.

#### 1024 Quadrature Amplitude Modulation Mode


1024-QAM increases throughput in Wi-Fi devices by encoding more data in the same amount of spectrum.

#### Transmit Beamforming

Enables higher data rates at a given range resulting in greater network capacity.

#### Orthogonal Frequency Division Multiple Access

OFDMA effectively shares channels to increase network efficiency and lower latency for both uplink and downlink traffic in high demand and dense environments.

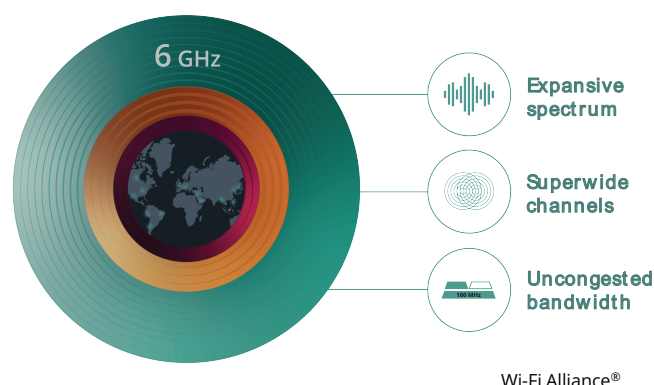

### The Appeal of Wi-Fi in 6 GHz

- Better capacity, coverage, and performance
- Optimized for congested environments: robust performance even with high numbers of devices
- Power consumption tailored for IoT devices
- Wi-Fi 6E devices extend into 6 GHz

### SX-PCEAX Key Features


- Complies with IEEE 802.11ax
- **5 GHz, 6GHz:** Support 20/40/80/160 MHz bandwidth mode
- **2.4 GHz:** Support 20/40 MHz bandwidth mode
- 2 spatial data stream system (2T2R)
- Bluetooth 5.2 BR/EDR/LE compatible (Backward compatible)
- Security: OPEN, WPA2-PSK(AES), WPA3-OWE, WPA3-SAE
- Manufacturing tools for configuration test
- Diagnostic and DUT test tools for indoor and outdoor test
- Modular Certifications for North America

# PCIe Wi-Fi6 Module


## Next Generation IEEE 802.11ax + BT Combo Module

**SX-PCEAX**

### Block Diagram

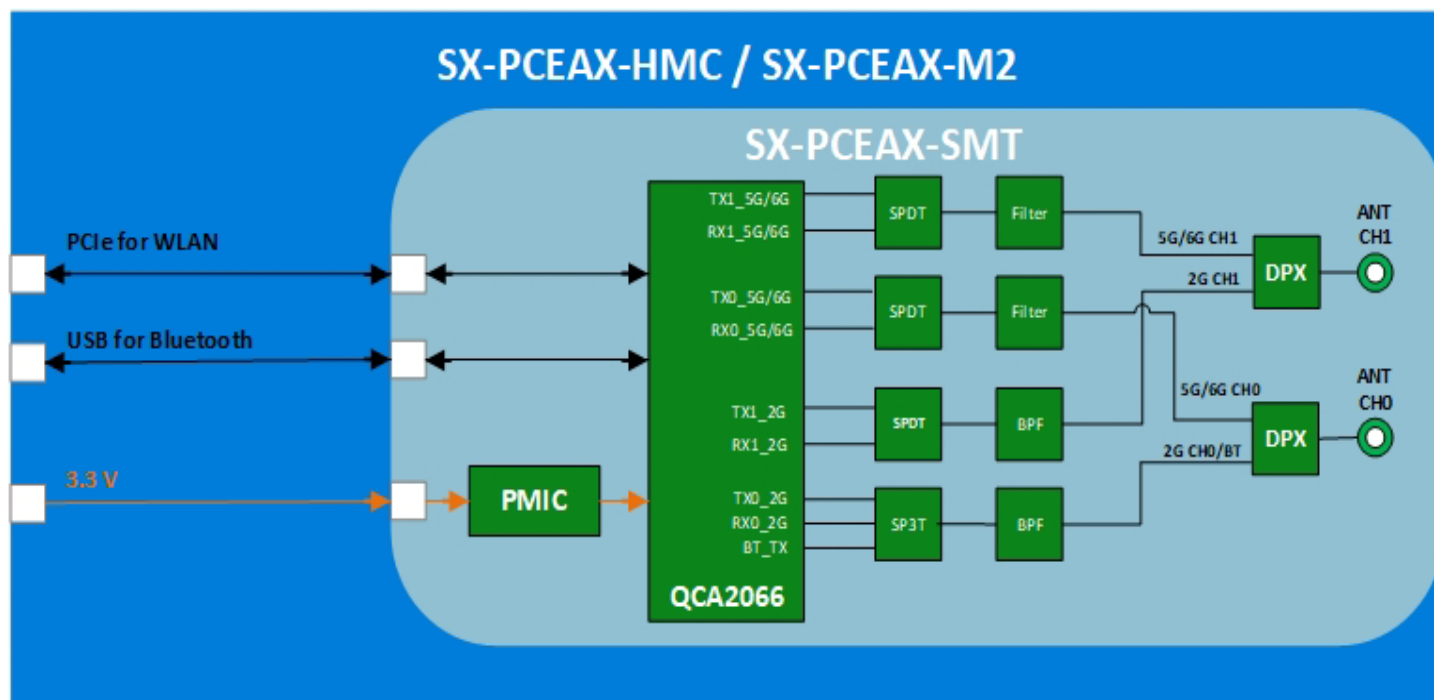

### Mechanical Specifications

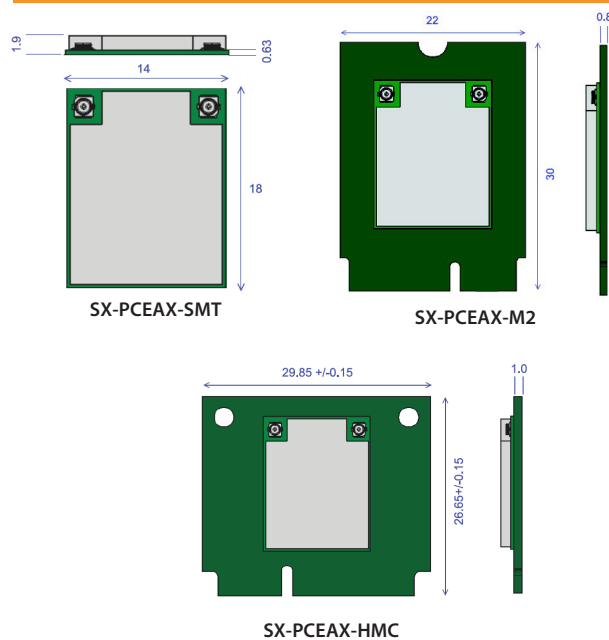

### Product Specifications

Model	SX-PCEAX-SMT (M.2 LGA Type 1418) SX-PCEAX-HMC (Mini PCIe Card Half Size) SX-PCEAX-M2 (M.2 Card Type 2230-S3-A-E)
Chipset	QCA2066
Host Interface	WLAN : PCIe 3.0 Bluetooth: USB1.1
WLAN Specification	IEEE 802.11a/b/g/n/ac/ax (2x2)
BT Specifications	Bluetooth v5.2 (BR/EDR/HS/LE Compliant)
Antenna Connector	MHF4 connector x 2
Operating Voltage	Main Power : 3.3 V ± 5%
Power Consumption (WLAN)	[2.4 GHz]: TBD [5 GHz]: TBD [6 GHz]: TBD
Operating Environment	Temperature: -20 ~ 65 °C Humidity : +5 ~ 85% RH (No Condensation)
Storage Environment	Temperature: -40 ~ 125 °C Humidity : +5 ~ 60% RH (No Condensation)
Dimensions	SX-PCEAX-SMT: 14.0mm x 18.0mm x 1.9mm SX-PCEAX-HMC: 29.85mm x 26.65mm x 2.9mm SX-PCEAX-M2: 22.0mm x 30.0mm x 2.7mm
Weight	TBD
Modular Certifications	TELEC/FCC/IC/CE

### Evaluation Kit

SX-PCEAX-HMC is a mini PCIe half mini card designed to allow easy evaluation of the radio using Boundary Device's Nitrogen8M based on NXP's i.MX8M processor. We provide a Linux OS evaluation image which includes Silex's reference radio driver, supplicant and tools to test the radio.

Contact Silex Sales to discuss early access and enablement.

silex technology is a registered trademark of silex technology, Inc. Other product or brand names may be registered trademarks of their respective owners.  
Technical information and specifications are subject to change without notice. © 2021 silex technology, Inc. All rights reserved.



### silex global sales & support locations

**US Office**  
silex technology america, Inc.  
+1-657-218-5199  
www.silextechnology.com  
sales@silexamerica.com

**Europe Office**  
silex technology europe, GmbH  
+49-2154-88967-0  
Germany toll free 0800-7453938  
www.silextechnology.com  
sales@silexeurope.com

**China**  
silex technology beijing, Inc.  
+86-10-8497-1430  
www.silex.com.cn  
contact@silex.com.cn

**Corporate Headquarters**  
silex technology, Inc.  
+81-774-98-3781  
www.silex.jp  
support@silex.jp

